


Quickfit Panel System

Design Advantages

- 1 FCS Quickfit Panels are quick and simple to; install, remove and re-fit. Up to 160m² can be installed in one day.
- 2 Quickfit Panels are thermally efficient with low thermal mass and low heat losses, giving great energy savings and lower start up costs.
- 3 The Quickfit Panel construction is lightweight, non-distorting with a very high strength-to-weight ratio.
- 4 The thermally efficient lining is coated with our uniquely developed KC2000 hot face coating which protects the fibre lining and reflects energy. (Please see the FCS KC2000 data sheet).
- 5 The Quickfit lining has a typical rating of 1400°C and a density of 192kg/m³.
- 6 The mechanical stainless steel fixing of the panel is suitable for heavy vibration situations.
- 7 The FCS Quickfit System has been used within the steel industry for over 30 years and is tried and tested. It is guaranteed to be successful.

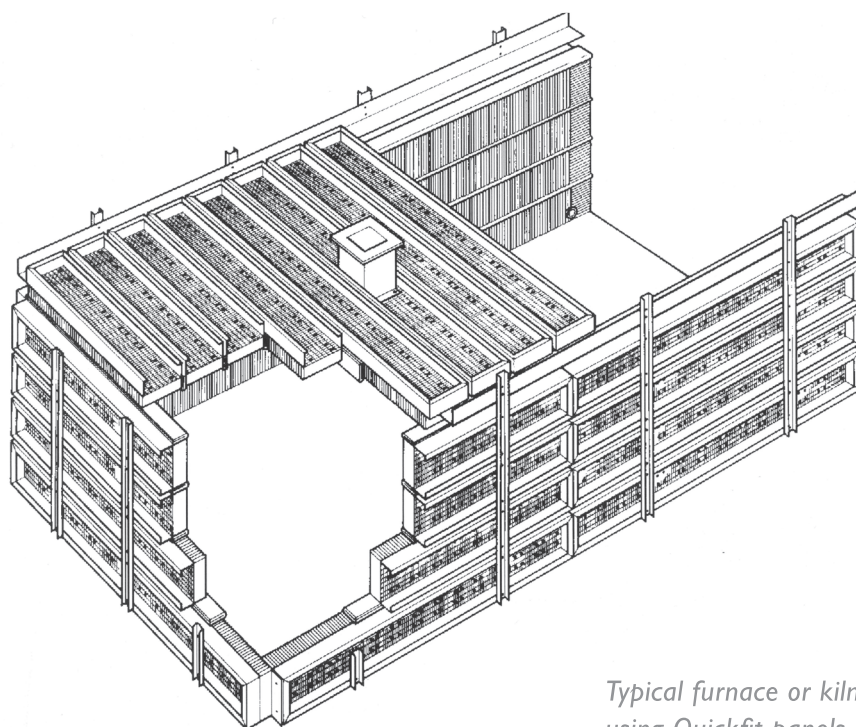

*Typical furnace or kiln design
using Quickfit panels.*

Quality and Innovation



UNIT 1 - UNIT 39 - UNIT 113, ANGLESEY BUSINESS PARK
LITTLEWORTH ROAD, CANNOCK, STAFFORDSHIRE WS12 1NR

T: +44 (0)1543 871787 F: +44 (0)1543 425757
E: info@fcs-ltd.com W: www.fcs-ltd.com

